


Keyseat Cutter - Full Radius



T 型 R 刀

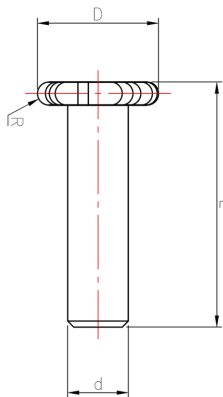

MODE	Diameter	Corner Radius	Length after Shrink	Shank Diameter	Full Length	Flutes
型號	D 刀徑	R 值	燒結後伸出長	d 柄徑	L 全長	Z 刃數
TMRS080050	8	0.5	13	4	30	6
TMRS080075		0.75	13		30	6
TMRS080100		1	13		30	6
TMRS100050	10	0.5	13	4	30	6
TMRS100075		0.75	13		30	6
TMRS100100		1	13		30	6
TMRS120050	12	0.5	13	6	30	6
TMRS120075		0.75	13		30	6
TMRS120100		1	13		30	6
TMRS160050	16	0.5	12	8	30	8
TMRS160075		0.75	12		30	8
TMRS160100		1	12		30	8
TMRS160125		1.25	12		30	8
TMRS160150		1.5	12		30	8
TMRS200050	20	0.5	14	10	35	8
TMRS200075		0.75	14		35	8
TMRS200100		1	14		35	8
TMRS200125		1.25	14		35	8
TMRS200150		1.5	14		35	8
TMRS200250		2.5	19		40	8
TMRS200300		3	19		40	8
TMRS200350		3.5	24		45	8
TMRS200400		4	24		45	8
TMRS250050	25	0.5	14	12	35	10
TMRS250100		1	14		35	10
TMRS250125		1.25	14		35	10
TMRS250150		1.5	14		35	10
TMRS250250		2.5	19		40	10
TMRS250300		3	19		40	10
TMRS250350		3.5	24		45	10
TMRS250400		4	24		45	10
TMRS300050	30	0.5	10	16	35	10
TMRS300100		1	10		35	10
TMRS300150		1.5	10		35	10
TMRS300200		2	10		35	10
TMRS300250		2.5	15		40	10
TMRS300300		3	15		40	10
TMRS300350		3.5	20		45	10
TMRS300400		4	20		45	10

特殊規格可依需求接單生產
Make to order for special requests is available.

Application 適用材質：

◎ Recommend 最適合 ○ Suitable 適合 X Not Recommend 不建議

carbon steel, Alloy steel 炭素鋼, 合金鋼	Pre-hardened steel 預硬鋼	High-hardened 高硬度鋼				Stainless steel 不銹鋼	Copper alloy 銅合金, 銅	Aluminum alloy 鋁合金
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC			
◎	◎	○	X	X	X	○	○	○